
THE QUICK4® PLUS STANDARD LP CHAMBER

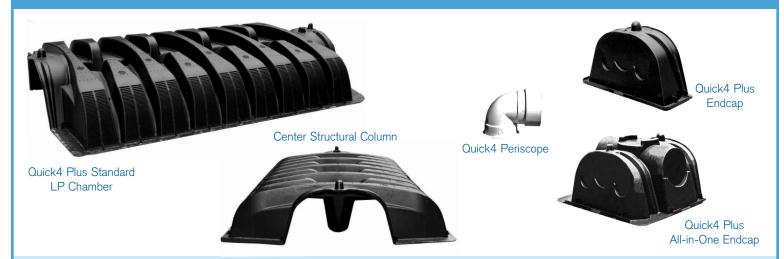

The Quick4 Plus Standard Low Profile (LP) Chamber offers maximum strength through its center structural column. This chamber can be installed in a 36-inch-wide trench. This chamber is shorter than other standard models allowing for shallower installation. Like the original line of Quick4 chambers, it offers advanced contouring capability with its Contour Swivel Connection™ which permits 10-degree turns, right and left. It is also available in four-foot lengths to provide optimal installation flexibility. The Quick4 Plus All-in-One and the Quick4 Plus End Caps are available with this chamber, providing increased flexibility in system configurations.

Quick4 Plus Standard LP Chamber

- Low Profile design makes this chamber is ideal for shallow applications
- Center structural columns offers superior strength
- Advanced contouring connections
- Latching mechanism allows for quick installation
- Four-foot chamber lengths are easy to handle and install

Quick4 Plus End Cap

- Simple, flat design
- Allows installation of a pipe from the end only
- Piping drill points are set for gravity or pressure pipe

Quick4 Plus All-in-One End Cap

- May be used at the end of chamber row for an inlet or outlet and can be installed mid-trench
- Mid-trench connection feature allows construction of chamber rows with center feed, as an option to inletting at the ends of chamber rows
- Center feed connection allows for easy installation of serial distribution systems
- Pipe connection options include sides, ends or top


Quick4 Plus All-in-One Periscope


- Allows raised, invert installations
- 180° directional inletting
- Nine inch raised invert great for serial applications




THE QUICK4 PLUS STANDARD LP CHAMBER

Quick4 Plus Standard LP Chamber Side and End Views







Quick4 Plus All-in-One End Cap Front, Side and End Views










Quick4 Plus End Cap Front, Side and End Views







Quick4 Plus All-in-One Periscope



Quick4 Plus Standard Chamber Specifications

Size (W x L x H) 34" x 53" x 8" (86 cm x122 cm x 20 cm)

Invert Height 0.6", 3.3", 7", 8" (1.52 cm, 8.4 cm, 18.5 cm, 22.6 cm)

INFILTRATOR SYSTEMS, INC. STANDARD LIMITED WARRANTY

(a) The structural integrity of each chamber, end cap and other accessory manufactured by Infiltrator ("Units"), when installed and operated in a leachfield of an onsite septic system in accordance with Infiltrator's instructions, is warranted to the original purchaser ("Holder") against defective materials and workmanship for one year from the date that the septic permit is issued for the septic system containing the Units; provided, however, that if a septic permit is not required by applicable law, the warranty period will begin upon the date that installation of the septic system commences. To exercise its warranty rights, Holder must notify Infiltrator in writing at its Corporate Headquarters in Oil Saybrook, Connecticut within fifteen (15) days of the alleged defect. Infiltrator will supply replacement Units for Units determined by Infiltrator to be covered by this Limited Warranty. Infiltrator's liability specifically excludes the cost of removal and/or installation of the Units.

(c) This Limited Warranty shall be void if any part of the chamber system is manufactured by anyone other than Infiltrator. The Limited Warranty does not extend to incidental, consequential, special or indirect damages. Infiltrator shall not be liable for penalties or liquidated damages, including loss of production and profits, labor and materials, overhead costs, or other losses or expenses incurred by the Holder or any third party. Specifically excluded from Limited Warranty coverage are damage to the Units due to ordinary wear and tear, alteration, accident, misuse, abuse or neglect of the Units; the Units being subjected to vehicle traffic or other conditions which are not permitted by the installation misuse, abuse or neglect of the Units; the Units being subjected to vehicle traffic or other conditions which are not permitted by the installation instructions; failure to maintain the minimum ground covers set forth in the installation instructions; the placement of improper materials into the system containing the Units; failure of the Units or the septic system due to improper siting or improper sizing, excessive water usage, improper grease disposal, or improper operation; or any other event not caused by Infiltrator. This Limited Warranty shall be void if the Holder fails to comply with all of the terms set forth in this Limited Warranty, Further, in no event shall Infiltrator be responsible for any loss or damage to the Holder, the Units, or any third party resulting from installation or shipment, or from any product liability claims of Holder or any third party. For this Limited Warranty to apply, the Units must be installed in accordance with all site conditions required by state and local codes; all other applicable laws; and Infiltrator's installation instructions.

(d) No representative of Infiltrator has the authority to change or extend this Limited Warranty. No warranty applies to any party other than the

The above represents the Standard Limited Warranty offered by Infiltrator. A limited number of states and counties have different warranty require



6 Business Park Road • P.O. Box 768 Old Saybrook, CT 06475 860.577.7000 • FAX 860.577.7001

800.221.4436 www.infiltratorsystems.com

For technical assistance, installation instructions or customer service, call Infiltrator Systems at 800.221-4436